

SHAFTLESS UNWIND


RM 200



RONCO
MACHINE & RIGGING

www.roncomachine.com | sales@roncomachine.com | 1.877.33.RONCO | St. Augustine, FL | Reading, PA | Lake Winola, PA | Albany, GA | Exeter, UK

TECHNICAL CHARACTERISTICS

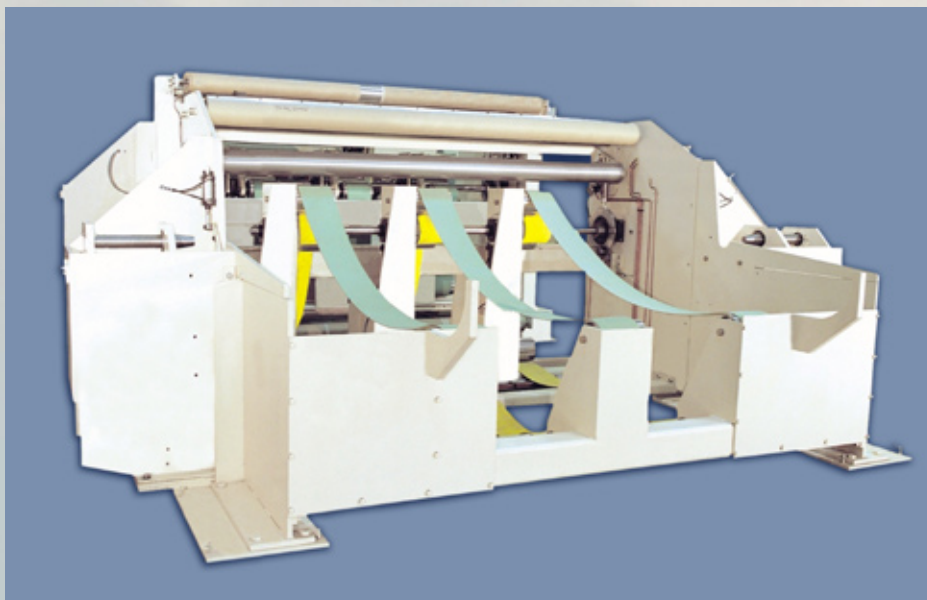

STANDARD FEATURES:

- Maximum operating speed up to 2500 ft/min
- Available widths from 66" (1676mm) to 140" (3556mm)
- Parent roll diameter up to 84" (2134mm)
- Parent roll weight up to 6000 lbs
- Pneumatic core ejector with core catchers
- Dancer roll and "foxboro" for web tension
- Two 10" belt drives up to 110" (2794mm)
- Three 10" belt drives up to 140" (3556mm)
- Power web alignment adjustment.
- Pneumatic chuck/unchuck
- Air over hydraulic brakes
- Web break detectors
- Wad deflector

AVAILABLE OPTIONS:

- Splice detection
- Parent roll lifting hook
- Ply bonding system mounts to front of unwind
- Gearbox and line shaft drive connection for unwind
- Web guide to allow back web to flow over front unwind
- Web thread-up system, between unwinds and embosser
- Service platform with steps placed on the operators side
- Adjustable spindle assemblies with 10" of adjustment per side

